



AUDI / VW / Porsche / Bentley M.O.S.T. 150 to 12-channel Analog & Digital sound processor



NAV-TV

INTERFACING THE FUTURE
3950 NW 120th Ave, Coral Springs, FL 33065 TEL 561-955-9770 FAX 561-955-9760

WARNING: Do not connect any RCA cables to the ZEN-V interface or additional processors prior to properly grounding aftermarket amplifier(s)!


Overview

The NAV-TV ZEN-V processor seamlessly converts late model AUDI, VW, Porsche & Bentley factory MOST-150 audio bus to 12-channel analog RCA and TOSLink output. Adding aftermarket amplifiers to the OE MIB, MIB2 or PCM4 / 4.1 system has never been so simple and seamless. This kit integrates with the OEM M.O.S.T. ® bus to retain volume control, full fade and balance (analog only), treble, mid-range, bass control & Bluetooth voice calls with no external speaker (true OEM integration). *NOTE: OEM radio systems not equipped with an amplifier or fiber must be flashed with the VAG-COMM or NAV-TV's ZEN-V-PRG (NTV-KIT861, sold separately) prior to installation. Vehicles equipped with an OEM amplifier do not need to be flashed.*

Kit Content



ZEN-V overview

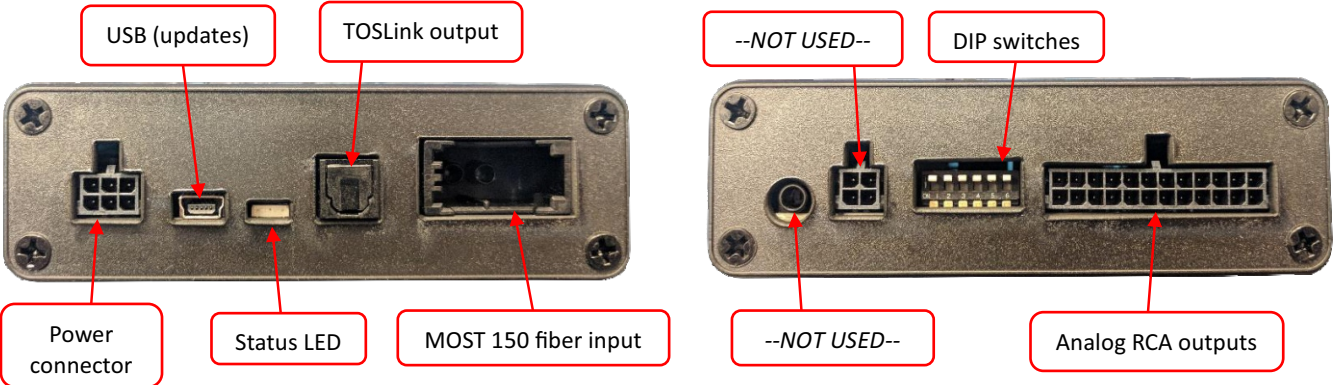


ZEN-V Compatibility (MIB, MIB2 or PCM4/4.1 radio only)

Year(s)	Make	Model
2015+	AUDI	Any model with <i>confirmed</i> MIB, MIB HS or MIB2 radio (A3, TT, etc.)
2017+	AUDI	A3, A4, A5, A6, A7, A8, Q5, Q7, S3, S4, S5, S6, S7, S8, SQ5, TT
2017+	Porsche	911, Boxster, Cayenne, Cayman, Macan, Panamera
2017+	Bentley	Bentayga
2016+	VW	ANY model with MIB, MIB HS or MIB2

ZEN-V Installation

1. If this vehicle has a factory amplifier, it must be removed and the ZEN-V can be installed into its place. If this vehicle is not amplified from factory, install the ZEN-V behind the radio.

2. Connect the following wires from the provided **power harness**:



ZEN-V pin	Color	To vehicle:
1	Yellow	12v (+) Constant
3	Violet	--Reserved, NOT USED--
4	Black	Ground (-)
6	Blue	12v (+) remote output*

*This remote wire must be used for aftermarket amplifier remote for proper functionality. **If installing more than one amplifier/DSP, a relay must be used for reliable turn-on (500mA max).**

3. **Before connecting power to the ZEN-V**, adjust dip-switch settings for the desired options:

	Time Alignment	Attenuation	TOSLink DownMix	Loudness	Vehicle Settings	
Position	DIP 1	DIP 2	DIP 3	DIP 4*	DIP 5	DIP 6
UP (off)	Front Row	Full Scale output (0 dB)	DownMix ON	Loudness OFF	See Below	
DOWN (on)	Driver Focused	-12 dB output	DownMix OFF	Loudness ON		

DIP 5	DIP 6
X	X

AUDI

DIP 5	DIP 6
	X
X	

Porsche

DIP 5	DIP 6
X	
	X

Bentley
Bentayga

DIP 5	DIP 6
X	X

VW



4. If using analog RCAs for signal to the amplifier, connect according to the reference chart below.
WARNING: Do not connect RCA cables to this interface until all amplifiers/external processors are properly grounded. Failure to do this may cause damage to the interface and VOID the warranty!

1	2	3	4	5	6	7	8	9	10	11	12
Left Front	Right Front	Left Front	Right Front	Left Front	Right Front	Left Rear Door	Right Rear Door	Left Rear Center	Right Rear Center	Center	Sub

5. If using TOSLink for signal to the amplifier, connect the cable to the TOSLink port shown on page 2.
NOTE: both Analog and Digital output sound simultaneously, regardless of which type is used.


6. Connect the provided **MOST Fiber Cable** from the (previously removed) amplifier, or from the radio's fiber port to the MOST port on the ZEN-V.

ZEN-V General Installation Notes

This interface can be installed in vehicles with or without an amplifier & with or without MOST fiber optic presently installed.

1. Vehicles with fiber amplifier: the amplifier must be removed. Connect the OEM fiber previously connected to the amp, directly into the ZEN-V.
2. Vehicles without OEM amplifier or MOST fiber: Use the supplied fiber optic extension and connect from the fiber port behind the radio to the MOST fiber port on the ZEN-V. **NOTE: If the vehicle does not possess an OEM amplifier, you must program the system for with amplifier & fiber for the ZEN-V to operate properly. Use a VAG-COM or NAV-TV's ZEN-V-PRG programmer**
3. Vehicles without amplifier but still equipped with fiber: Disconnect the fiber from the radio, disassemble the fiber coupler and route the provided MOST extension into the factory MOST loop like shown below (to continue proper MOST data flow):

NOTE: If the vehicle does not possess an OEM amplifier, you must program the system for with amplifier for the ZEN-V to operate properly. Use a VAG-COM or NAV-TV's ZEN-V-PRG programmer

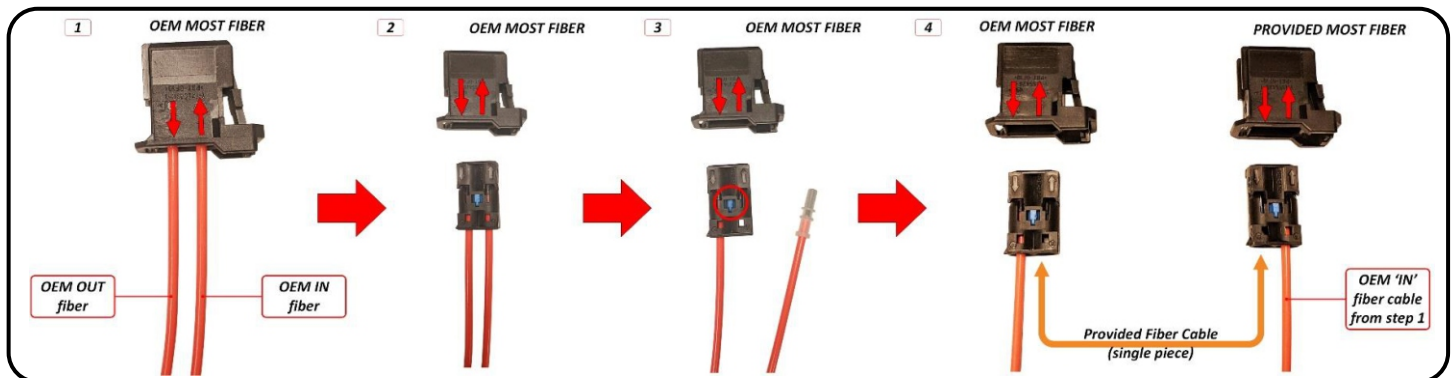

Tuning tips:


1. Before beginning tuning process (especially with external EQ/Processors), set Bass & Treble on the head unit for each source to flat (0).
2. Begin with amplifier/EQ gains all the way **down**.
3. With dynamic music playing, adjust the radio volume to maximum.
4. Adjust the amplifier/EQ gains to desired maximum level.

Multi-Color LED Status Indication




LED Status	Indication
<i>Solid Red</i>	MOST Active
<i>Violet</i>	MOST traffic commands
<i>Blinking Red</i>	<i>Peaking</i> (maximum digital signal level achieved)
<i>Blinking Blue</i>	PC Link with app (future use)

ZEN-V System Layout (analog)

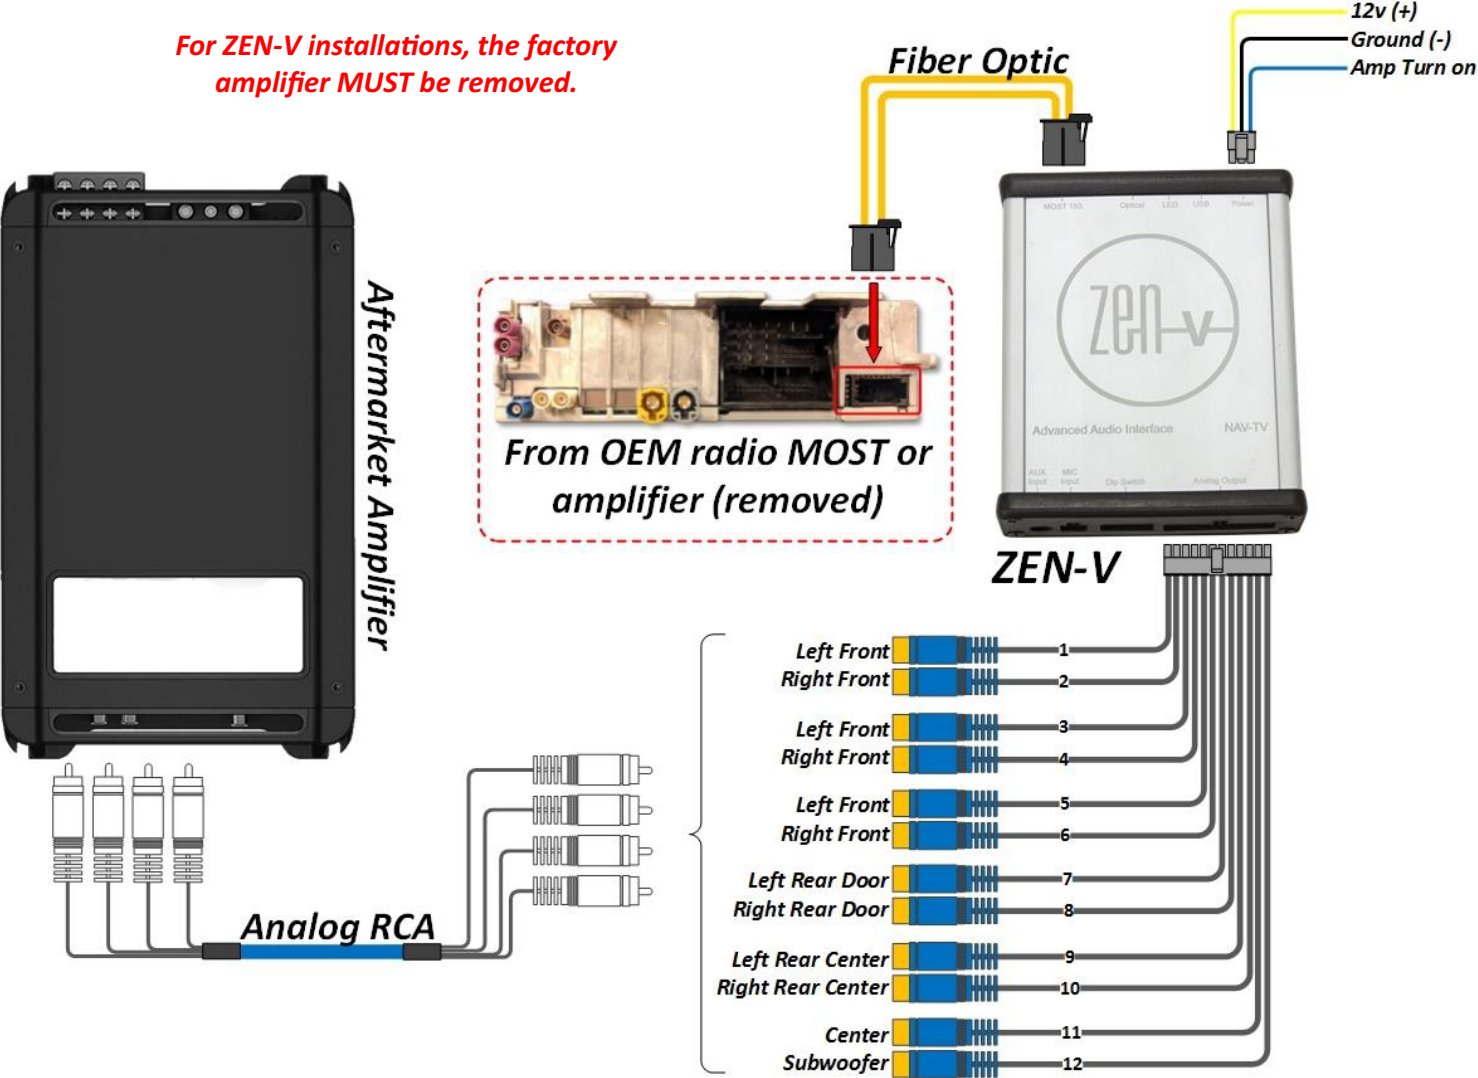

ZEN-V System Layout (digital TOSLink)

**For ZEN-V installations,
the factory amplifier
MUST be removed.**

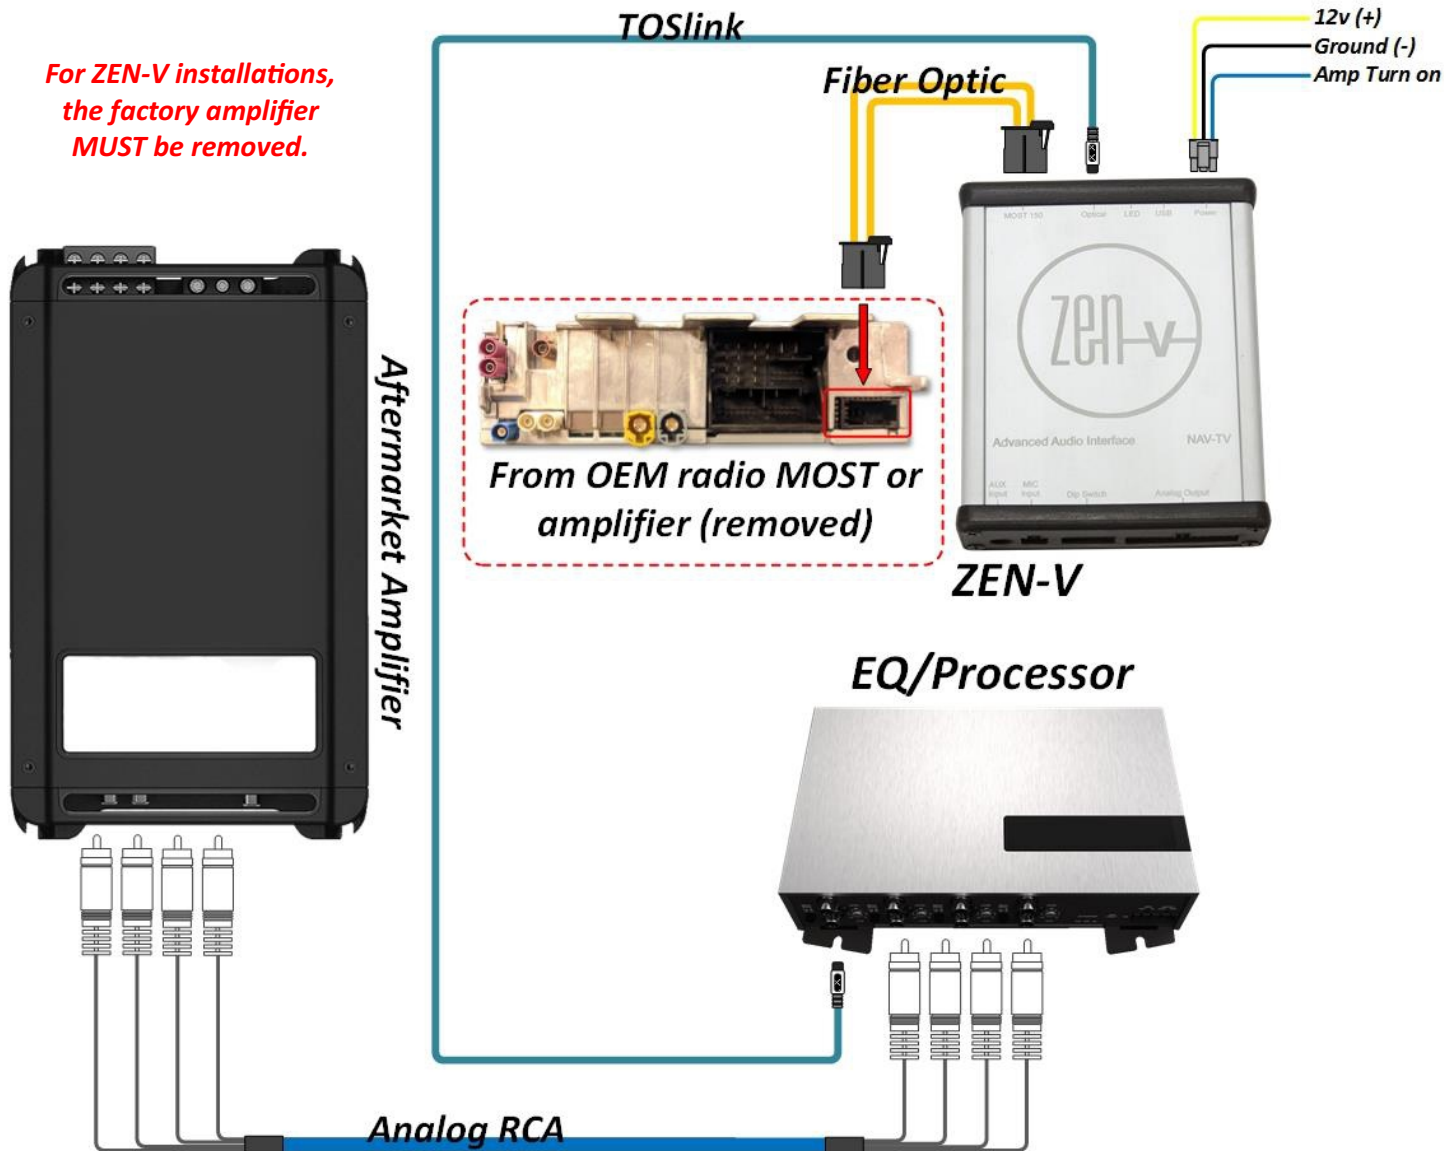

When flashing the vehicle for fiber (if not factory fiber or amp-equipped), you will gain extra audio controls not available previously. See below for each vehicle radio type for what gets added.

Added controls & options (AUDI A3: MIB)

For AUDI A3, *Surround* is added, and is used for *direct Subwoofer control* from the ZEN-V (RCA #12)



Added controls & options (AUDI: MIB-HS)

For AUDI vehicles with MIB HS (new high-res GUI), Subwoofer, Bass, Mid-range and Treble are now individually controllable from the radio screen, direct to the ZEN-V.



Added controls & options (VW vehicles: MIB 2 STD)

For VW vehicles, an extra sound control menu is added. Subwoofer, Bass and Treble are now individually controllable from the radio screen, direct to the ZEN-V.



ZEN-V Technical Specifications

<i>Hardware & Software</i>	
Current HW version:	--1r0--
Current SW version:	ZEN-V-1.5.2-4-5-18
Compatible SW (update) OS:	Windows 7 (64 bit), 8, 10
<i>INPUT</i>	
Digital Input	MOST 150 Fiber Optic
<i>OUTPUT</i>	
Digital Outputs:	TOSLink
Digital Outputs supported:	24bit/48kHz
Frequency Response (digital):	18Hz – 24kHz
Analog Outputs:	12 channels (RCA)
Output Voltage <i>Peak</i> :	6v
Output Voltage <i>RMS</i> :	2.1v
Analog Output Type:	Single-Ended
S/N Ratio (analog):	123dB
Frequency Response (analog):	18Hz – 24kHz
THD+N @ -1dBFS	-94dB
DAC	48kHz 32bit
DSP	128bit Floating Point
Delay (Time Alignment)	Selectable
<i>Power Supply</i>	
Current Consumption Stand-by	<1 mA
Current Consumption Operational	350 mA MAX
Operational Voltage	7V – 20V DC
Amp Turn-On Output	Automatic
Amp Turn-On Voltage	V-batt
Amp Turn-On Current Limitation	500mA
<i>Other</i>	
Dimensions:	4"x5"x1 3/8"
Weight:	10 oz
Country of Origin:	USA



FOR TECH SUPPORT, PLEASE CALL
+(0) 44 333 700 1515